




**HARLAND
ENGINEERING**

Pumps | Acoustics | Design

EBARA OPTIMA SUBMERSIBLE PUMP

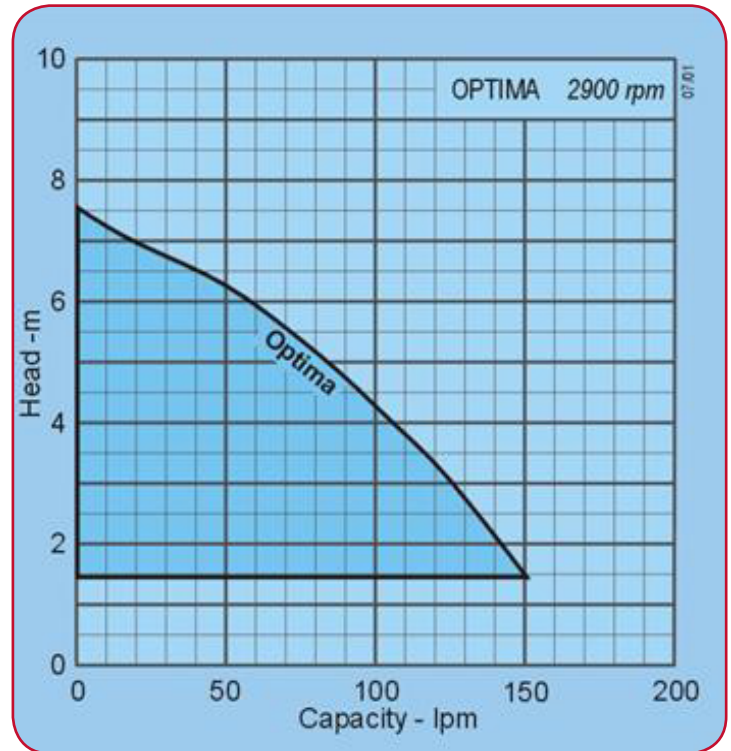

Constructed of 304 stainless steel & thermoplastic, with mechanical seal. Available with a float switch for automatic operation, these are suitable for many domestic applications: Draining garage sumps, cellars, etc

- > Emptying ponds and tanks
- > Emergency water transfer

Output:	0.44 to 1.1 kW (1ph)
Outlet Size:	25 mm
Flow Rates:	5 to 75 lpm
Head:	15 to 59 m
Max Liquid temp:	45°C
Max. work pressure:	6 Bar

FEATURES

- > 5m Cable
- > 240V
- > Automatic float operation
- > Noryl Impeller
- > 50 degree celsius maximum temperature
- > Mechanical seal in oil bath with upper lip seal

SPECIFICATIONS

Part Number: Optima
Price: \$330.00 plus delivery